
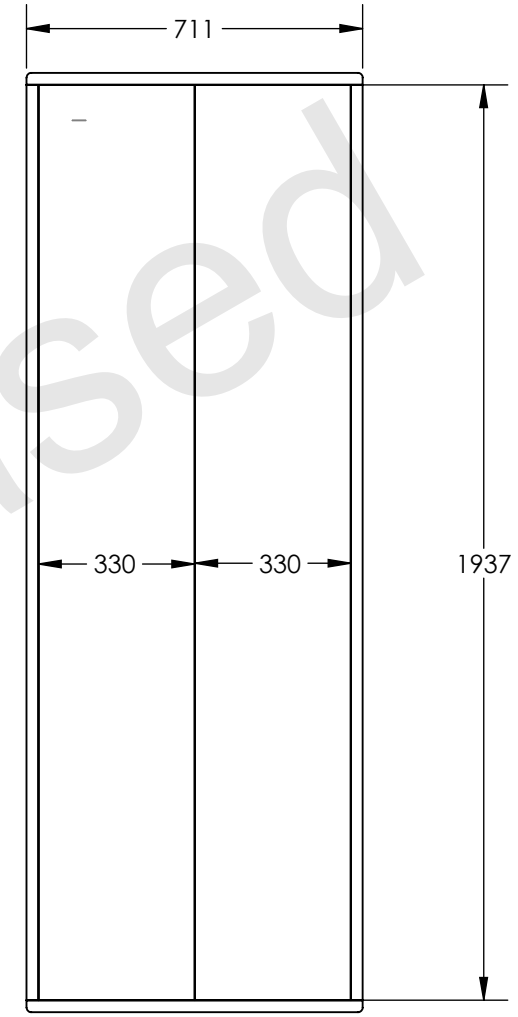


REVISIONS				
REV	DESCRIPTION	DATE	DRAWN	APPROVED BY
00	INITIAL RELEASE	05/13/2024	R. AURELIA	-

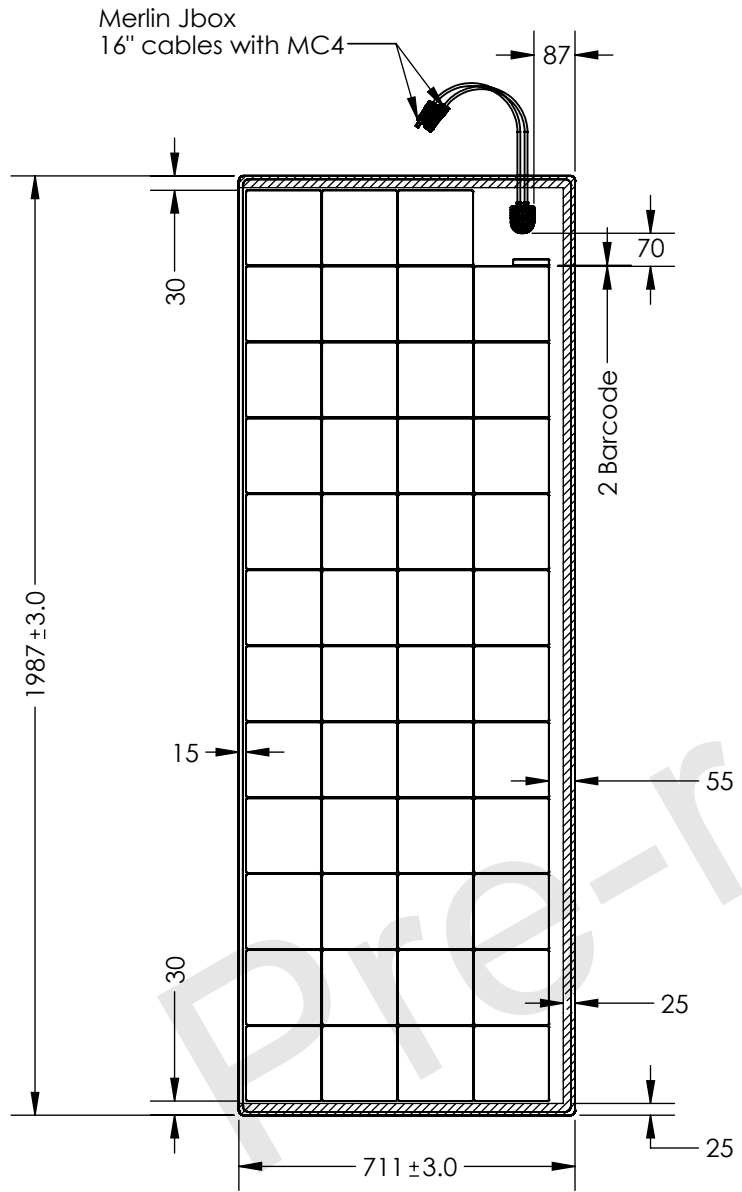


BOM: Non-Certified - G1 9BB Cell  
 Color: Black  
 Pmax: 235W ; Voc: 31.2V ; Vmp: 26.3V ; Imp: 9A ; Isc: 9.15A  
 Taping: 5908 1" Edge Tape + 3M 9775 WL+ Filler Tape  
 Jbox: SKU007 (Merlin Jbox with 12AWG 16" cables with Techflex + MC4 Connectors)  
 Weight: ~5.3kgs / 11.786lbs  
 Hatch Area free to punch holes

UNLESS OTHERWISE SPECIFIED  
 UNITS: (MM)  
 MODEL TOLERANCES  
 0-50 mm: ± 1 mm  
 50-300 mm: ± 2 mm  
 300+ mm: ± 3 mm  
 SINGLE DECIMAL: ± 0.2mm  
 TWO DECIMAL: ± 0.1mm  
 ANGLES: ± 1/2°  
 ANY DIMENSIONS NOT SPECIFIED IN  
 THIS DRAWING REFER TO  
 ISO 2768-MH  
 THIRD ANGLE  
 PROJECTION

**MERLIN SOLAR TECHNOLOGIES**  
 WWW.MERLINSOLAR.COM  
 THIS DRAWING IS THE PROPERTY OF  
 MERLIN SOLAR TECHNOLOGIES AND  
 THE INFORMATION CONTAINED  
 HEREIN IS PROPRIETARY.  
 ANY COPIES, DISTRIBUTION OR  
 DISCLOSURE OF THIS DRAWING  
 WITHOUT THE WRITTEN CONSENT OF  
 MERLIN SOLAR TECHNOLOGIES IS  
 EXPRESSLY PROHIBITED.

DRAWING TYPE		
MODULE CTQ		
TITLE		
RWS-P0470BFLE		
DOC NO.		REV
RWS-P0470BFLE-CTQ		00
SIZE	DO NOT SCALE DRAWING	SHEET 1 OF 2
A4	SCALE: 1:16	

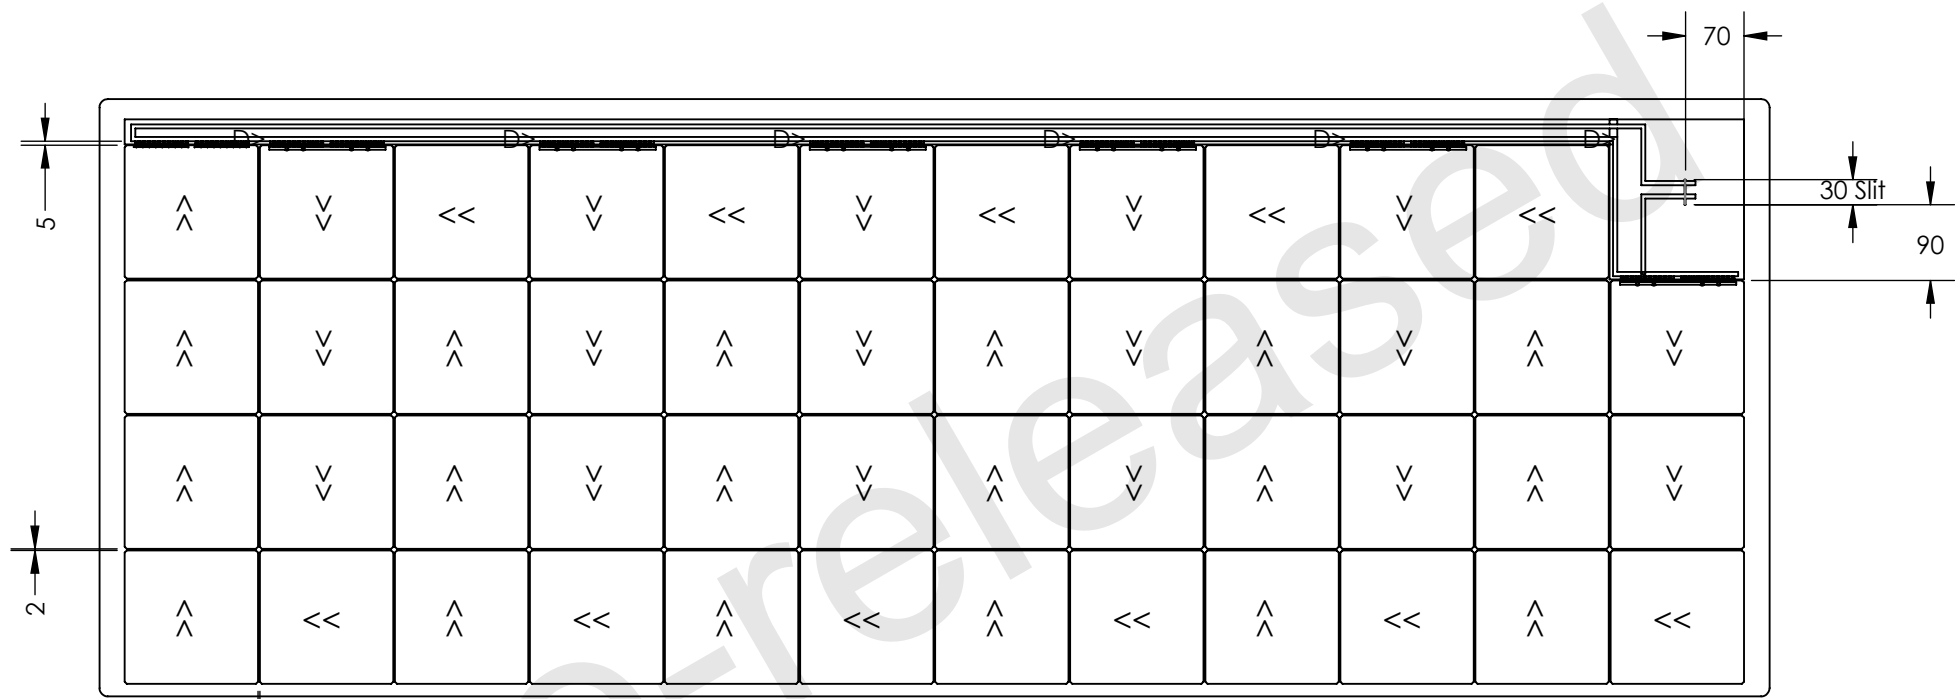

Back View

Double Diode  
 D> Direction towards notch

TITLE RWS-P0470BFLE		
SIZE A4	DO NOT SCALE DRAWING SCALE: 1:9	SHEET 2 OF 2