

1000W

PURE SINE WAVE


INVERTER

DC 12V to AC 120V

SAFETY FEATURES

- Electronic overload protection with automatic shutdown.
- Built-in internal backup DC fuse provides added safety.
- Low battery voltage protection with automatic shutdown.
- Over temperature protection with automatic shutdown.
- Output short circuit protection.

SPECIFICATION

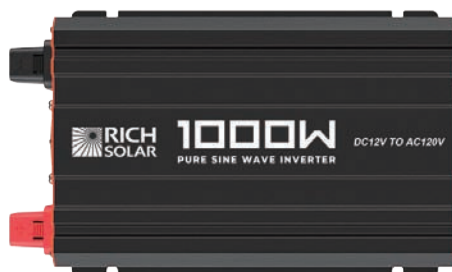

Model	RS-V1P12
Input Voltage	12V DC
Continuous Power	1000W
Output Voltage	120V AC
Peak Surge	2000W
Efficiency	>88%
Frequency	60Hz
Total Harmonic Distortion(THD)	<3%
No Load Current Draw	<1.0A
Battery Low Alarm	10.5V±0.5V DC
Battery Low Shutdown	10.0V±0.5V DC
Over Voltage Shutdown	16.5V±0.5V DC
Cooling Fan	Thermally controlled
Ac Output Sockets	3
Usb Power Port	5V/2.1A
Power Output Control	AC On/Off Switch
Dimensions	310x195x82(mm)/12.6x7.7x3.2(in)
Net Weight (Approximate)	2.4(kg)/5.3(lb)
Certification	ETL Listed to UL 458 and CSA 22.2 NO 107.1-01